

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)



PCT

(10) International Publication Number
WO 2004/023182 A1

- (51) International Patent Classification⁷: G02B 6/22, H01S 3/30
- (21) International Application Number: PCT/FI2003/000646
- (22) International Filing Date: 4 September 2003 (04.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20021580 4 September 2002 (04.09.2002) FI
- (71) Applicant (for all designated States except US): LIEKKI OY [FI/FI]; Sorronrinne 9, FIN-08500 Lohja AS (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): TAMMELA, Simo [FI/FI]; Visamäki 3 E 30, FIN-02130 Espoo (FI).
- (74) Agent: TAMPEREEN PATENTTITOIMISTO OY; Hermiankatu 12 B, FIN-33720 Tampere (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), DE (utility model), DK (utility model), DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR SPECTRAL FILTERING

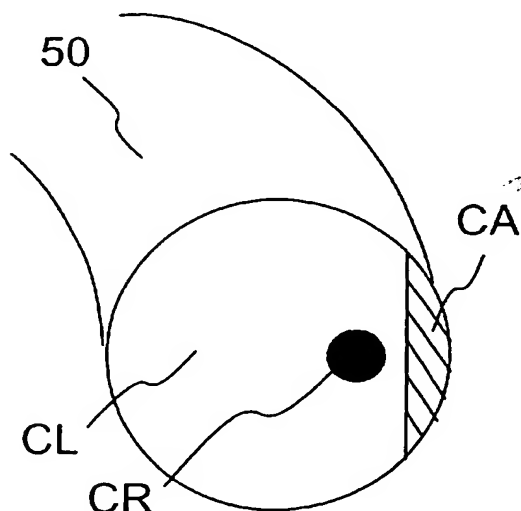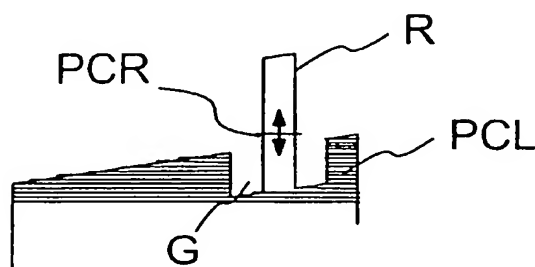

(57) Abstract: The invention refers to a method and a device in optical fiber based spectral filtering, where a length of an optical fiber (40) comprising at least a core region (CR) surrounded by a cladding region (CL) is coiled over its length in whole or in part to subject the fiber to longitudinal curvature in order to affect the optical transmission properties of the fiber. According to the invention the fiber (50) is arranged to have radially asymmetric refractive index distribution (R) and in addition to coiling the fiber lengthwise, the fiber is over its length in whole or in part also twisted around its longitudinal axis. The invention can be used to significantly improve the performance of fiber based filtering devices.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

METHOD AND DEVICE FOR SPECTRAL FILTERING

The present invention relates to a method in optical fiber based spectral filtering according to the preamble of the appended claim 1.

- 5 The invention further relates to a spectral filter device implementing the method in accordance with the preamble of the accompanying claim 6.

10 Telecommunications based on optical fibers is a rapidly evolving technical field. In addition to long distance transmission fibers replacing more traditional conducting wire cables, a large variety of other types of optical fiber components are also required in order to make up a complete modern optical telecommunication system. Such components include, for example, optical amplifiers based on rare-earth metal doped active fibers and different types of spectral multiplexing and
15 filtering devices. Spectral filtering in various forms is especially important in systems based on wavelength division multiplexing, WDM.

It is known that an optical fiber, more specifically a single mode fiber can be used as a spectral filter device by coiling the fiber around a reel
20 or corresponding circular body in order to subject the fiber lengthwise to a certain continuous curvature. The radius of this curvature determines the cut-off wavelength of such a coiled fiber filter. With smaller radius of the curvature the cut-off wavelength moves towards shorter wavelengths. When the wavelength of the light transmitted
25 through the fiber core exceeds the aforementioned cut-off wavelength, the optical power starts to leak from the fiber core to the cladding layer surrounding the core. In the cladding layer the light experiences significantly higher attenuation than in the fiber core. The overall attenuation characteristics of a the fiber filter can be controlled by the
30 number of fiber turns coiled around the reel.

In practise, the operation of a coiled fiber filter deviates from ideal because above the cut-off wavelength all of the wavelengths do not become attenuated equally and homogeneously. Because only a finite
35 number of guided modes exists in the cladding layer, some wavelengths become coupled to cladding modes more effectively than others. The limited number of cladding modes gives rise to a certain amount of

unwanted coupling of the light from the cladding layer back to the fiber core, i.e. reversed coupling effects. As a result of these aforementioned effects, the typical transmission of a prior art coiled fiber filter shown in Fig.1 as graph P is not a smooth downward curve after the cut-off wavelength λ_{off} , but instead shows significant "interference" peaks at certain wavelengths. For comparison, Fig. 1 also shows a more desirable smooth transmission graph I of a more ideal low-pass filter.

From the prior art certain solutions are known in order to reduce the aforementioned effects. These solutions are primarily based on the idea of increasing the attenuation of the cladding layer and/or by arranging the cladding layer to be surrounded with a specific envelope layer, which allows the light to leak from the cladding layer further to this outside envelope or jacket layer. However, these prior art solutions have certain significant limitations. Because they are basically based on increasing the attenuation of the cladding layer, they are not suitable for those applications where also the cladding layer itself is utilized as an optical waveguide. Such applications include, for example, cladding pumped optical fiber amplifiers, where the pump light propagating in the cladding layer should not become attenuated due to the intrinsic optical properties of the cladding layer.

The objective of the present invention is to introduce a new approach that makes it possible to construct optical fiber based spectral filtering devices, whose spectral properties are superior to the prior art devices. Especially, the intention is to achieve filter devices where after the cut-off wavelength the transmission drops down more smoothly than in the prior art devices. Further, one specific objective of the invention is to construct devices, which are also suitable to be used in the kind of applications, where, in addition to the fiber core, also the cladding layer of the fiber has a role of acting as an optical waveguide. An important example of such application can be found among cladding pumped fiber amplifiers.

In order to achieve the aforementioned objectives, the method according to the invention is primarily characterized in what will be presented in the characterizing part of the appended claim 1.

The device according to the invention is in turn primarily characterized in what will be presented in the characterizing part of the appended claim 6.

5

Advantageous embodiments of the invention are presented in the appended dependent claims.

10

In this invention it has been rather surprisingly discovered that the performance of a coiled optical fiber filter can be significantly improved when the fiber is twisted over its length in whole or in part around its longitudinal axis in addition to subjecting it to a certain longitudinal curvature.

15

In order for the longitudinal twisting of the fiber to have the desired effect, the optical fiber needs to be of a type without radial symmetry, i.e. radially asymmetrical fiber. Such radially asymmetrical optical fibers are known as such from the prior art. Radial asymmetry can be achieved, for example, by using an off-centered core, or by providing a

20

cladding layer where the refraction index varies in a radially asymmetrical manner. Radial asymmetry may also be achieved by using optical fiber structures, where the cross-section of the fiber core (or even cladding) is non-circular. Such fibers are known from polarization sensitive applications. Fundamentally, in this context the

25

radial asymmetry refers broadly to any optical fiber structures where the radial distribution of the refractive index is asymmetrical.

30

In an optical fiber filter, where the fiber is both coiled and twisted according to the invention, the leak of light from the fiber core to the cladding layer takes place more ideally than in the prior art filters, i.e. without significant amount of reversed coupling effects. Above the cut-off wavelength all wavelengths thus "see" temporally substantially equal amount of matching with the cladding modes. In other words, when a certain length of the twisted and coiled optical fiber is

35

considered, with high probability, there always exist such cladding modes which allow the light to become coupled from the core to the cladding.

As a result of this the transmission curve of the device has a smoothly descending behaviour after the cut-off wavelength.

- 5 The current invention is especially suitable to be used as a distributed spectral filter in cladding pumped fiber amplifiers, because the fiber structure allows the propagation of the pump light in the cladding layer.

10 For a person skilled in the art, it is clear that compared to the prior art solutions, the invention significantly widens the possibilities to optimize the fiber filter structures. Without "interference" peaks the cut-off wavelength and the attenuation properties of the fiber filter can be more freely adjusted than in the prior art devices.

15 In the following, the invention will be described in more detail with reference to the appended drawings, in which

20 Fig. 1 shows schematically a typical transmission behaviour of a prior art coiled fiber filter together with a more ideal smooth transmission curve,

25 Fig. 2 shows some experimental and comparison results illustrating the basic transmission properties of an optical fiber filter according to the invention,

30 Figs 3a,b describe conceptually the propagation of light in a substantially straight and radially symmetric fiber,

35 Figs 4a,b describe conceptually the propagation of light in a longitudinally curved and radially symmetric fiber, and

40 Figs 5a,b,c describe conceptually the propagation of light in a longitudinally curved and radially asymmetric fiber, which has been twisted around its longitudinal axis according to the invention.

The following conceptual explanation is meant to describe, in a simplified way, some of the most important physical phenomena behind the invention. It should be noted that this description is not intended to be scientifically exhaustive, but it is only meant to help
5 recognise the most essential features of the invention.

To begin, a few measurement results are presented in Fig. 2 in order to illustrate the effect that can be achieved when the optical fiber in a coiled fiber filter is additionally twisted around its longitudinal axis
10 according to the invention. It should be understood, that the results in Fig. 2 and the construction of the corresponding fiber filter devices are provided only to illustrate the effect itself and therefore do not necessarily correspond with the results or construction of any practical fiber filter device.

15 The measurement results shown in Fig. 2 have been recorded using an approximately 2 meter long single-mode fiber having an off-centered core, i.e. a radially asymmetric construction. The fiber core diameter was 6 μm and the total diameter of the fiber including the cladding layer
20 was 125 μm . The core was located approximately 30 μm from the center. The refractive index distribution of the fiber was of the same "W-type" as schematically shown in Figs 5a-5c, i.e. with a depressed refractive index cladding region G next to the fiber core.

25 In Fig. 2 graph C70 first shows the transmission for the aforementioned off-centered fiber, which has been coiled without twisting one lap around a reel with an approximately 70 mm diameter. Therefore, graph C70 may be regarded to correspond to the performance of a prior art type fiber filter, such as shown schematically in Fig. 1 with graph P.
30 Graph TC70 shows the transmission of the same fiber in an otherwise similar situation, except that in this case the fiber was twisted around its longitudinal axis according to the invention. After coiling the fiber was twisted so that the fiber experienced an approximately 720° twist around its longitudinal axis substantially evenly along its coiled length.
35 In other words, the fiber was first coiled one turn around the 70 mm reel. Then the fiber was fixed from the starting point of the turn to the reel and the fiber was twisted approximately two full turns from the

point close to the ending point of the lap. It can be clearly seen, that graph TC70 corresponds to much more desirable transmission properties than graph C70.

- 5 For comparison, Fig. 2 also contains additional graphs MS70 and MS150. These graphs correspond to coiled, but non-twisted fibers with reel diameters of approximately 70 and 150 mm, correspondingly. The coating of these fibers was stripped off and immersion oil was further used for mode stripping, i.e. for elimination of the cladding modes.

10

In the following, with reference to Figs 3a-5c, the basic physical phenomena behind the invention are further explained together with some possible embodiments of the invention.

- 15 Figures 3a,3b describe conceptually the propagation of light in a substantially straight and radially symmetric fiber 30 comprising a core region CR and a cladding region CL. Figure 3a shows in its upper section the refractive index profile R and the corresponding mode field M of the fiber 30. In this case the refractive index profile R includes a narrow depressed refractive index cladding region G in the cladding next to the fiber core. In this depressed refractive index cladding region G the refractive index is arranged to be somewhat lower than in the other outer parts of the cladding region CL. Such "W-type" refractive index profiles R having a certain depressed region G in the refractive index around the fiber core are known as such from the prior art.
- 20 Respectively, Fig. 3b shows conceptually in its upper section the core mode propagation constant PCR and the cladding mode propagation constants PCL depicted with horizontal solid lines.

- 25
- 30 When the wavelength of the light changes, this affects the core mode propagation constant PCR in a known manner. This effect is depicted in Fig. 3b with arrow A. The core mode propagation constant PCR depends substantially linearly on the wavelength. When the core mode propagation constant PCR decreases the amount of mode field M in the cladding region CL increases exponentially. When the wavelength of light increases, the core mode propagation constant PCR becomes smaller and when the core mode propagation constant PCR and that of
- 35

the cladding modes PCL coincide, there exists strong coupling from the core mode to the cladding modes. The amount of the mode field in the cladding region CL gives the coupling coefficient between the core mode and the cladding modes. If and when the propagation constants
5 are the same for the core mode and a cladding mode, the power starts to go back and forth between these two modes.

Figures 4a,4b describe in a similar conceptual manner the propagation of light in a longitudinally curved and radially symmetric fiber 40.
10 Therefore, Figs 4a,4b describe the basic phenomena covering the operation of a prior art coiled fiber filter.

From Figs 4a,4b it can be seen that the curvature of the fiber 40 (to the left in Figs 4a,4b and also in Figs 5a-5c) causes an increase in the refractive index in the outer bend of the fiber 40. Therefore, the
15 refractive index profile R becomes tilted as schematically shown in the upper sections of Figs 4a,4b. Correspondingly, the propagation constants of the modes in the cladding region CL in the outer bend become elevated. This lowers the cut-off wavelength for a coiled and curved fiber.
20

The "interference" peaks shown in Figs 1 and 2 (graphs P and C70, respectively) arise due to the fact that there exists only a finite number of propagating modes in the cladding layer CL. Therefore, for certain
25 wavelengths above the cut-off wavelength the conditions become such, that the light power is able to couple to the cladding layer CL (and back) only at certain occasions when moving along the length of the fiber 40. In other words, when a certain length of the fiber 40 is considered, the different wavelengths become treated unequally in
30 what comes to the coupling between core CR and cladding CL and to the consequential loss of the light from core CR.

Figures 5a-5c now describe conceptually the propagation of light in a longitudinally curved and radially asymmetric fiber 50, which has been
35 further twisted around its longitudinal axis according to the invention. Figures 5a-5c describe three different situations with a relative twist of

approximately 90° between Figs 5a and 5b, and again the same between Figs 5b and 5c.

5 Because of the twist of the fiber 50, in different locations along the fiber length, the core mode propagation constant PCR can be found to have moved compared to the cladding modes PCL. The reason for this is that when moving along the length of the twisted and coiled fiber 50, the core CR moves into different positions compared to the outer curved surface (cladding surface) of the fiber (see lower sections of
10 Figs 5a-5c). This "averages" the coupling between the core mode to a certain set of the cladding modes. Now, above the cut-off wavelength substantially all wavelengths, i.e. substantially all core mode propagation constants PCR, "see" temporally an equal amount of matching with the cladding modes PCL. In other words, when a certain
15 length of the fiber 50 is considered, such cladding modes which allow the light to become coupled from the core to the cladding always exist. As a result of this, above the cut-off wavelength the transmission of the fiber 50 has a smooth descending behaviour without disturbing interference peaks.

20

In the lower sections of Figs 5a-5c the hatched area CA depicts the cross-sectional area in which the cladding mode propagation constants PCL are equal or higher than the core mode propagation constant PCR. In those situations the core and cladding modes have possibility
25 to match and energy can move from the core to the cladding layer.

In order for the longitudinal twisting of the fiber 50 to have the desired effect, the fiber 50 needs to have a certain degree of radial asymmetry. In the embodiment described in Figs 5a-5c the radial asymmetry is
30 achieved by using an optical fiber 50 with an off-centered core CR. However, the current invention is not limited to such embodiments, but also other means for providing radial asymmetry of the refractive index distribution may be applied. For example, radial asymmetry in a fiber can be achieved by providing a cladding layer CL where the refraction
35 index varies in a radially asymmetrical manner. Radial asymmetry may also be achieved by using such fiber structures, where the cross-section of the fiber core CR and / or the fiber cladding CL is non-

circular. Such fibers are known, for example, from certain polarization sensitive applications where the fiber core is non-circular or cladding pumped fibers where the fiber cladding is non-circular.

- 5 It should be noted, that even if the fiber 50 shown in Figs 5a-5c includes the depressed refractive index cladding region G in the cladding layer next to the fiber core, this is not an absolute necessity for a fiber filter according to the invention. Such a structure, however, is preferable in many applications because it makes the filtering effect
10 sharper.

The current invention is especially suitable to be used as a distributed spectral filter in cladding pumped fiber amplifiers, because the fiber structure now allows the propagation of the pump light in the cladding
15 layer. For a person skilled in the art, it is clear that compared to the prior art solutions the invention significantly widens the possibilities to optimize the fiber filter structures. Without "interference" peaks the cut-off wavelength and the attenuation properties of the fiber filter can be freely engineered and fine-tuned according to the respective needs.

20 The invention also makes it possible to use very large fiber core designs (>10 μm), which can handle higher laser powers without problems created by non-linear optical phenomena.

25 An important benefit of the invention is that the fiber filter devices according to the invention are simple to manufacture also in practise. In addition to coiling an optical fiber, the fiber only needs to be twisted around its longitudinal axis either before, during or after the coiling process. The strength of the effect can be adjusted by selecting the
30 amount of twisting (degrees or turns) per a certain length of the fiber. The twisting may be arranged to appear evenly along the total length of the fiber, or to be concentrated only to certain parts of the fiber. In a fiber filter having several laps coiled around a reel, the twisting may be arranged to distribute over all of the coiled laps or only to some or one
35 of the coiled laps. Depending on the amount of radial asymmetry of the fiber, the amount of twisting may be freely adjusted to accomplish desired transmission properties. These and other parameters, including

the length and the optical properties of the fiber, may be freely selected.

5 Even though the invention has been shown and described above with respect to selected types of embodiments, it should be understood that these embodiments are only examples and that a person skilled in the art could construct other fiber filter devices utilizing techniques other than those specifically disclosed herein while still remaining within the spirit and scope of the present invention. It should, therefore, be
10 understood that various omissions and substitutions and changes in the form and detail of the filter devices illustrated, as well as in the operation of the same, may be made by those skilled in the art without departing from the spirit of the invention. It is the intention, therefore, to restrict the invention only in the manner indicated by the scope of the
15 claims appended hereto.

Claims :

1. A method in optical fiber based spectral filtering, where a length of an optical fiber (40) comprising at least a core region (CR) surrounded by a cladding region (CL) is coiled over its length in whole or in part to subject the fiber to longitudinal curvature in order to affect the optical transmission properties of the fiber, **characterized** in that the fiber (50) is arranged to have radially asymmetric refractive index distribution (R) and in addition to coiling the fiber lengthwise, the fiber is over its length in whole or in part also twisted around its longitudinal axis.
2. The method according to claim 1, **characterized** in that the optical fiber (50) is arranged to have a radially off-centered core region (CR).
3. The method according to claim 1, **characterized** in that the optical fiber (50) is arranged to have a non-circular core (CR) or cladding (CL) region.
4. The method according to claim 1, **characterized** in that the optical fiber (50) is arranged to have a region (G) of depressed refractive index in the cladding region (CL) located in the vicinity of the core region (CR).
5. The method according to claim 1, **characterized** in that the optical fiber (50) is a single mode fiber.
6. An optical fiber device for spectral filtering containing a length of optical fiber (40), the fiber comprising at least a core region (CR) surrounded by a cladding region (CL), and the fiber being coiled over its length in whole or in part to subject the fiber to longitudinal curvature in order to affect the optical transmission properties of the fiber, **characterized** in that the fiber (50) is arranged to have radially asymmetric refractive index distribution (R) and in addition to being coiled lengthwise, the fiber is over its length in whole or in part also arranged to be twisted around its longitudinal axis.

7. The device according to claim 6, **characterized** in that the optical fiber (50) has a radially off-centered core region (CR).
- 5 8. The device according to claim 6, **characterized** in that the optical fiber (50) has a non-circular core (CR) or cladding (CL) region.
- 10 9. The device according to claim 6, **characterized** in that the optical fiber (50) has a region (G) of depressed refractive index in the cladding region (CL) located in the vicinity of the core region (CR).
- 10 10. The device according to claim 6, **characterized** in that the optical fiber (50) is a single mode fiber.
- 15 11. The device according to claim 6, **characterized** in that the optical fiber (50) is a rare-earth metal doped active fiber.
12. The device according to claim 11, **characterized** in that the optical fiber (50) constitutes a distributed fiber filter in an optical fiber amplifier.
- 20 13. The device according to claim 12, **characterized** in that the optical fiber (50) constitutes a part of a cladding pumped optical fiber amplifier.

25

30

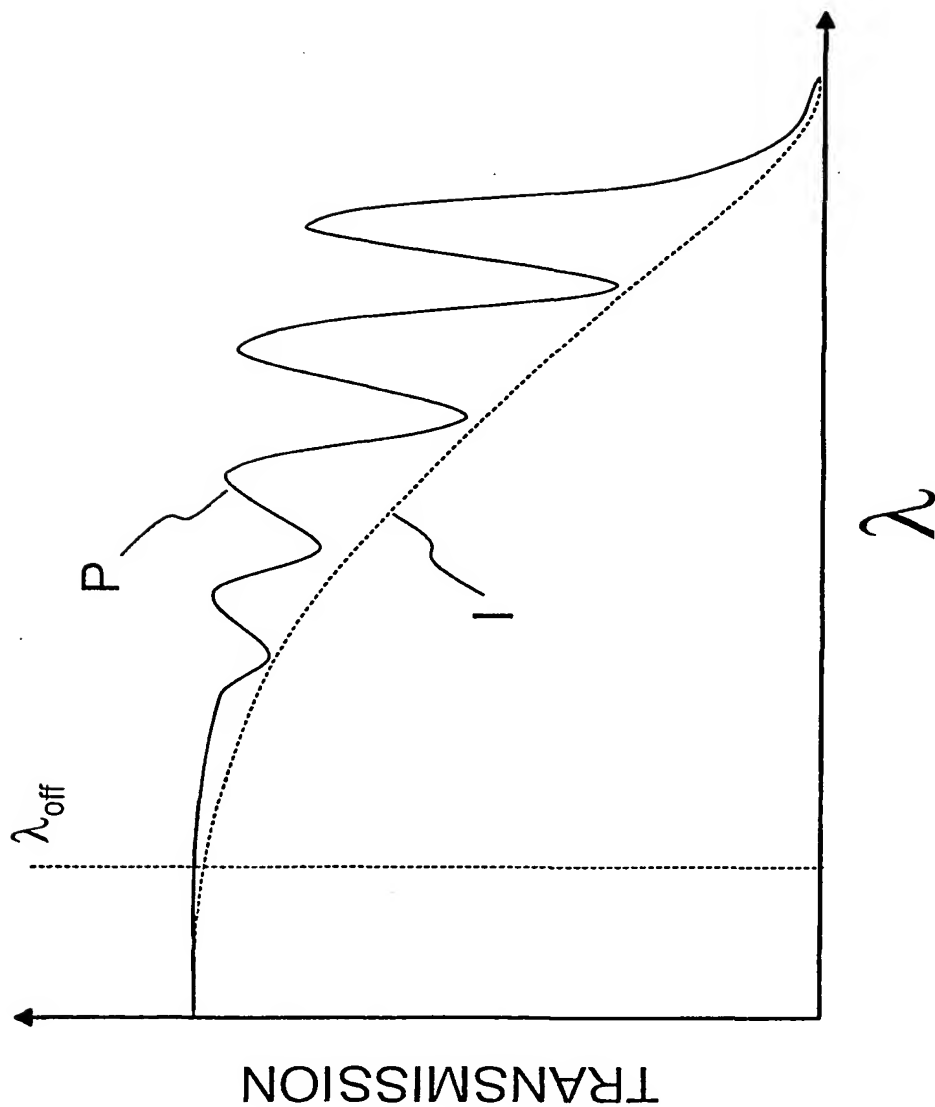


Fig. 1

BT01 Rec'd PCT/PTC 4 MAR 2005

THIS PAGE BLANK (USPTO)

10/526667

2/5

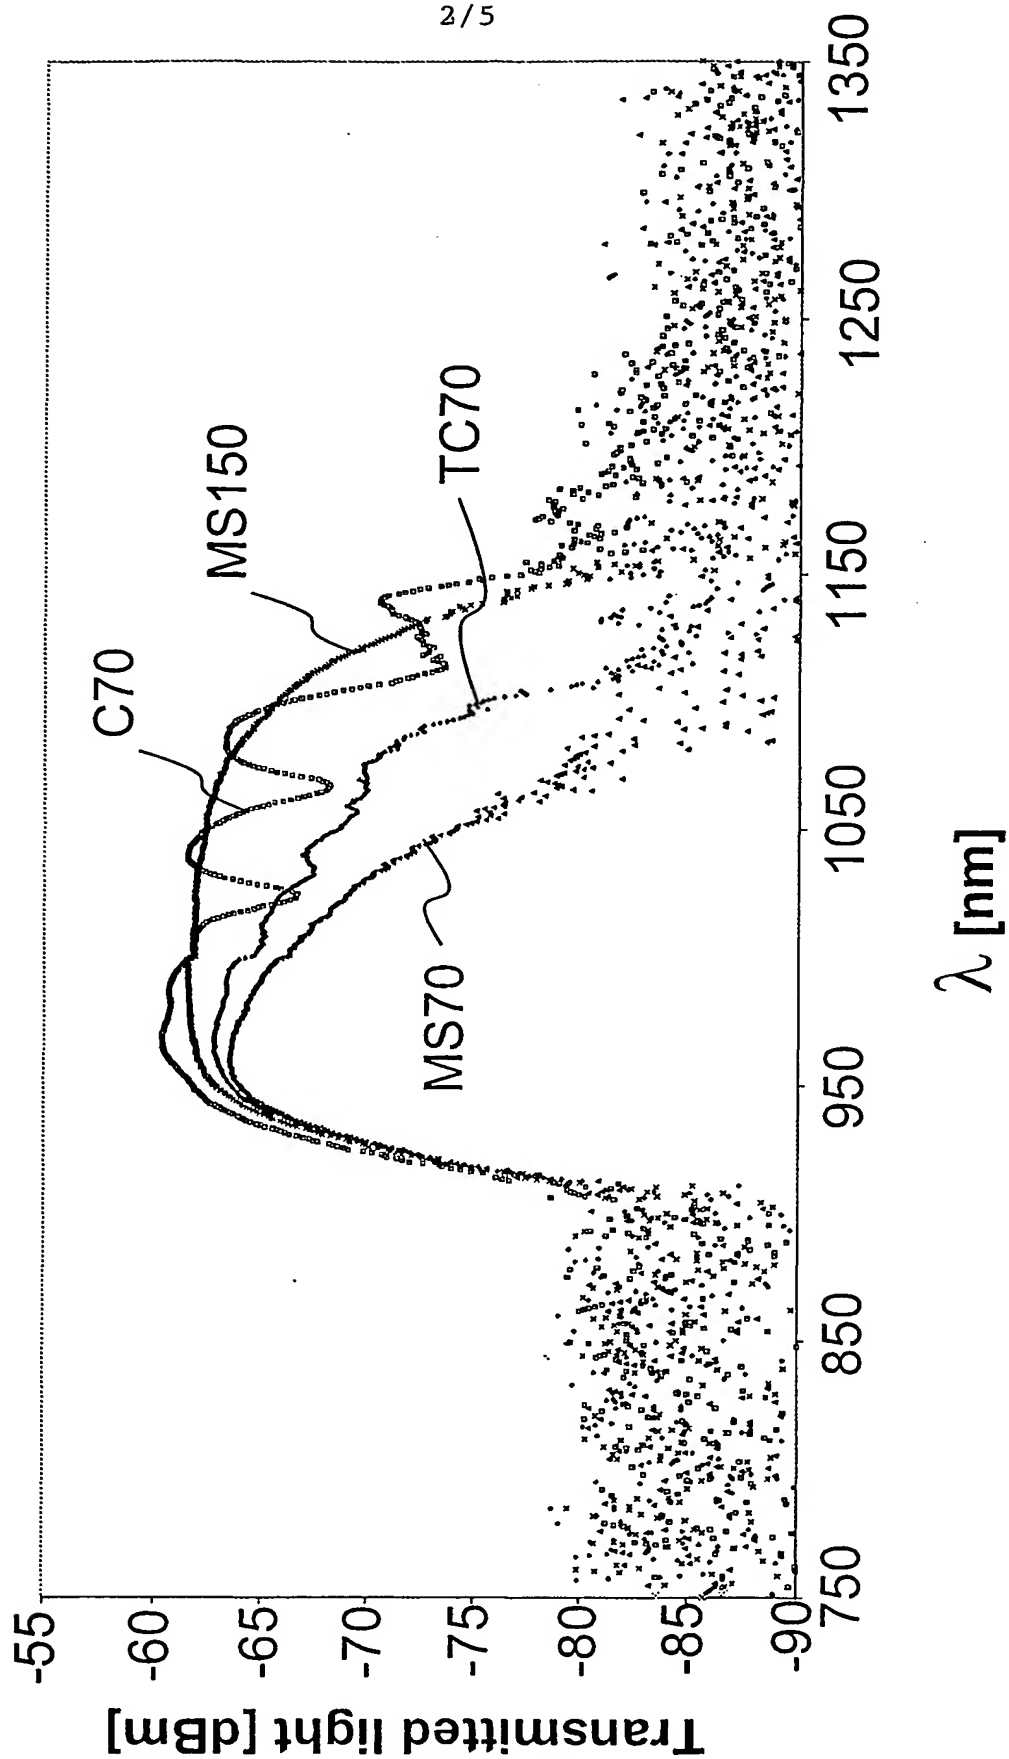


Fig. 2

DT01 Rec'd PCT/PTC 0 MAR 2005

THIS PAGE BLANK (USPTO)

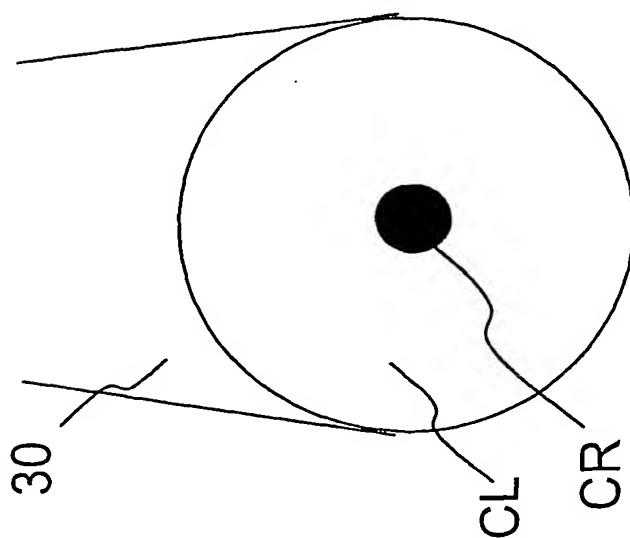
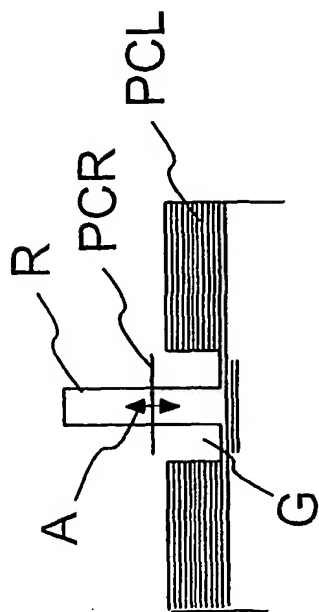
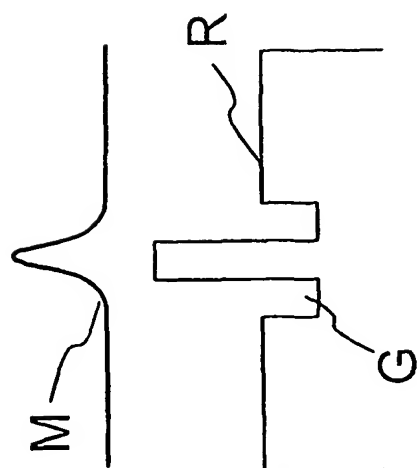


Fig. 3a

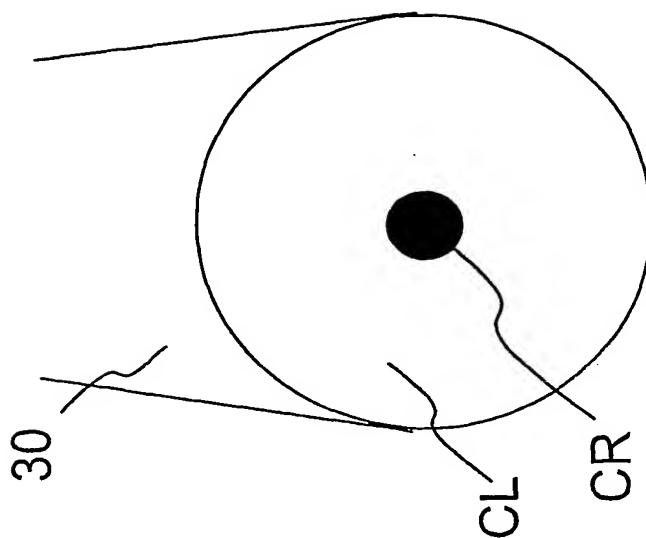


Fig. 3b

STU REND PCT/PTC 04 MAR 2005

THIS PAGE BLANK (USPTO)

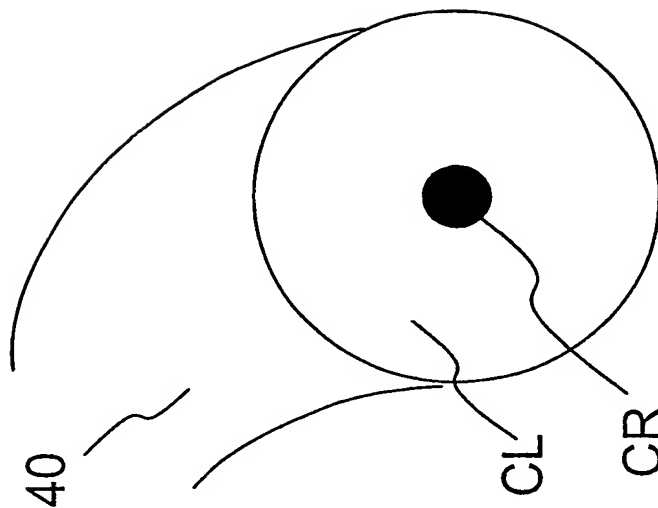
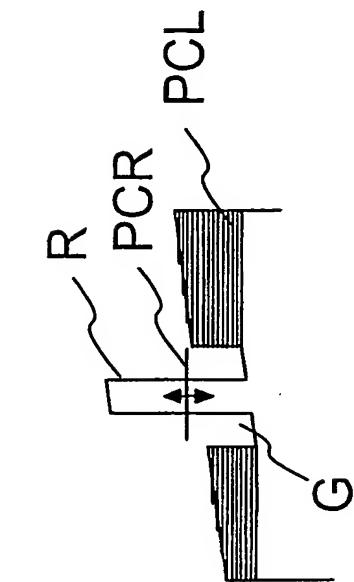


Fig. 4b

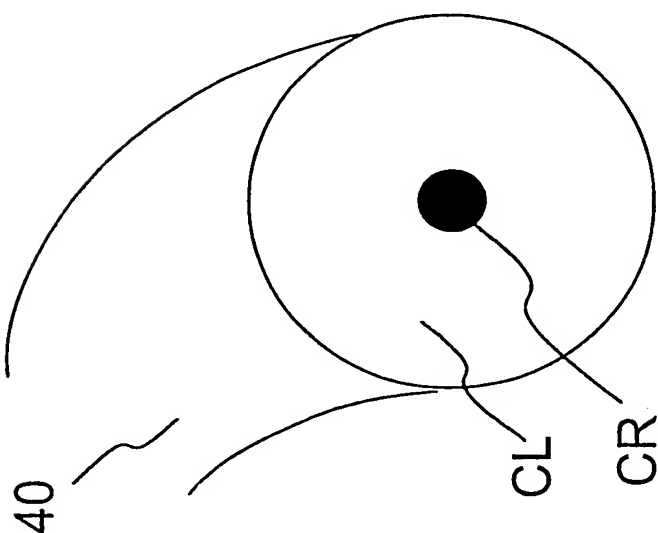
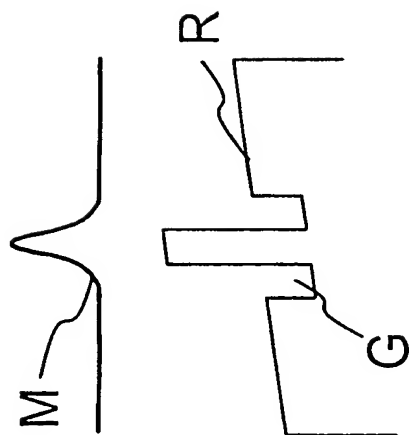


Fig. 4a

BT01 Rec'd PCT/PTC 0 4 MAR 2005

THIS PAGE BLANK (USPTO)

10/526667

5/5

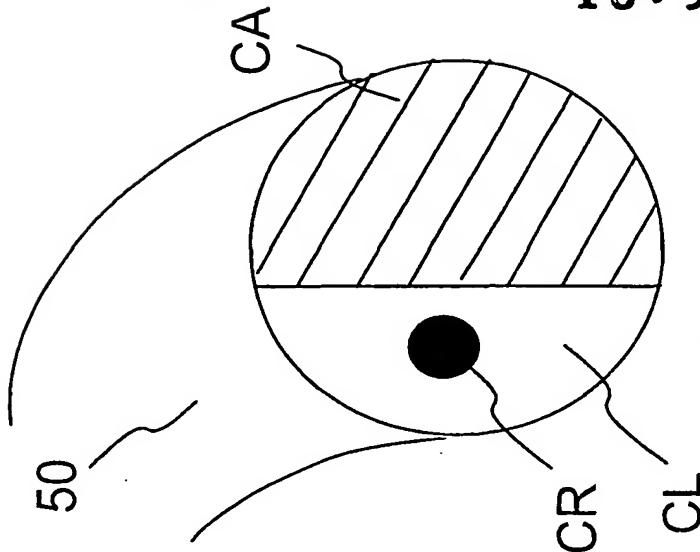
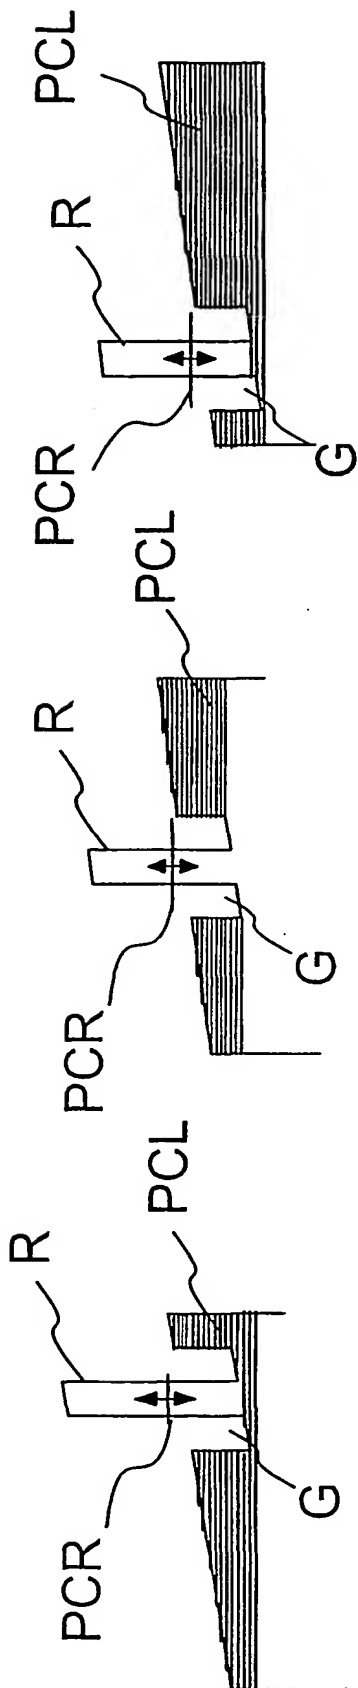


Fig. 5c

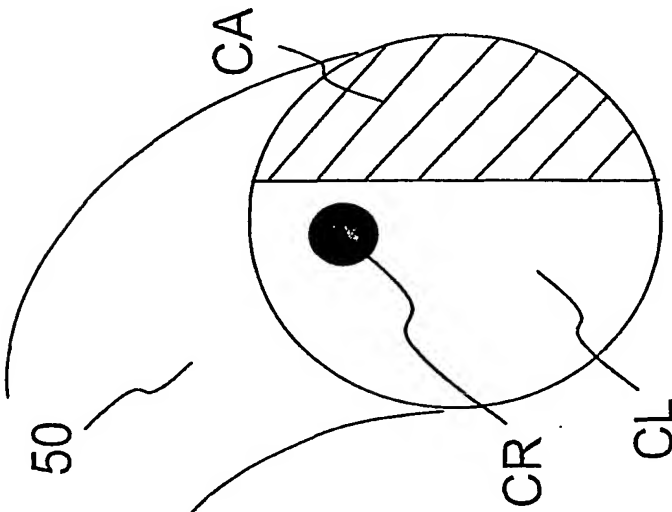


Fig. 5b

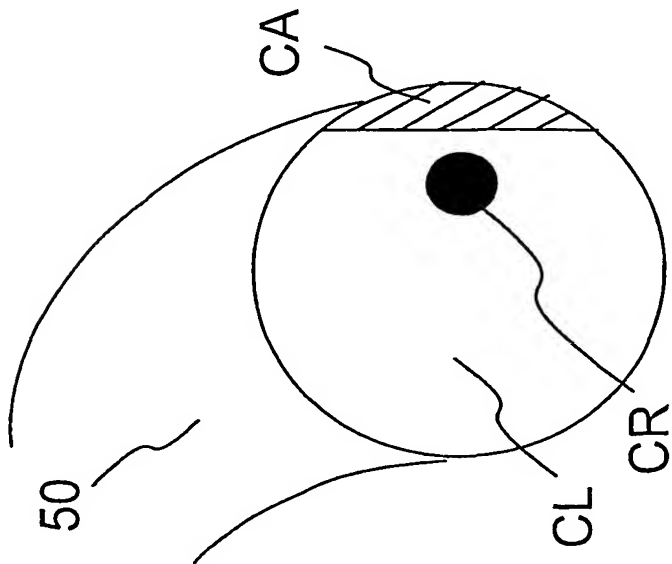


Fig. 5a

DT01 Rec'd PCT/PT 0 4 MAR 2005

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00646

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G02B 6/22, H01S 3/30

According to International Patent Classification (IPC) or to both national classification and IPC

10/526667

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G02B, H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0703475 A1 (FRANCE TELECOM), 27 March 1996 (27.03.96), column 1, line 1 - column 3, line 53, figures 1,2,6, claims 1,3-5 --	6-10,12,13
A	US 6118575 A (GRUBB ET AL), 12 Sept 2000 (12.09.00), column 2, line 24 - column 3, line 8, fig 1-4; claims 1-9,11-13,15-16 --	6-13
A	US 4372645 A (MILLER), 8 February 1983 (08.02.83), column 1, line 40 - column 2, line 21, figures 1-3, 6, claims 1-4 -- -----	1,2,4-7,9-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

21-11-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Igor Gazdik/EK

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

06/09/03

International application No.

PCT/FI 03/00646

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0703475	A1	27/03/96	FR	2724735 A,B	22/03/96
US	6118575	A	12/09/00	US	5892615 A	06/04/99
				US	6181465 B	30/01/01
US	4372645	A	08/02/83	US	4308045 A	29/12/81

From the INTERNATIONAL BUREAU

PCTNOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

To:

TAMPEREEN PATENTTITOIMISTO OY
Hermiankatu 12 B
FIN-33720 Tampere
FINLANDE

29-03-2004

TAMPEREEN
PATENTTITOIMISTO OYDate of mailing (day/month/year)
18 March 2004 (18.03.2004)Applicant's or agent's file reference
TP102386/JUV

IMPORTANT NOTICE

International application No.
PCT/FI2003/000646International filing date (day/month/year)
04 September 2003 (04.09.2003)Priority date (day/month/year)
04 September 2002 (04.09.2002)

Applicant

LIEKKI OY et al

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this notice:

AU, AZ, BY, CH, CN, CO, DZ, EP, HU, JP, KG, KP, KR, MD, MK, MZ, RU, TM, US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

AE, AG, AL, AM, AP, AT, BA, BB, BG, BR, BZ, CA, CR, CU, CZ, DE, DK, DM, EA, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, ID, IL, IN, IS, KE, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MG, MN, MW, MX, NI, NO, NZ, OA, OM, PG, PH, PL, PT, RO, SC, SD, SE, SG, SK, SL, SY, TJ, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this notice is a copy of the international application as published by the International Bureau on 18 March 2004 (18.03.2004) under No. WO 2004/023182

4. **TIME LIMITS** for filing a demand for international preliminary examination and for entry into the national phase

The applicable time limit for entering the national phase will, **subject to what is said in the following paragraph**, be **30 MONTHS** from the priority date, not only in respect of any elected Office if a demand for international preliminary examination is filed before the expiration of **19 months** from the priority date, but also in respect of any designated Office, in the absence of filing of such demand, where Article 22(1) as modified with effect from 1 April 2002 applies in respect of that designated Office. For further details, see *PCT Gazette* No. 44/2001 of 1 November 2001, pages 19926, 19932 and 19934, as well as the *PCT Newsletter*, October and November 2001 and February 2002 issues.

In practice, time limits other than the 30-month time limit will continue to apply, for various periods of time, in respect of certain designated or elected Offices. For regular updates on the applicable time limits (20, 21, 30 or 31 months, or other time limit), Office by Office, refer to the *PCT Gazette*, the *PCT Newsletter* and the *PCT Applicant's Guide*, Volume II, National Chapters, all available from WIPO's Internet site, at <http://www.wipo.int/pct/en/index.html>.

For filing a demand for international preliminary examination, see the *PCT Applicant's Guide*, Volume I/A, Chapter IX. Only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination (at present, all PCT Contracting States are bound by Chapter II).

It is the applicant's sole responsibility to monitor all these time limits.

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

Gijsbertus Beijer - Carlos Roy

Facsimile No.(41-22) 740.14.35

Telephone No.(41-22) 338.91.11

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)